

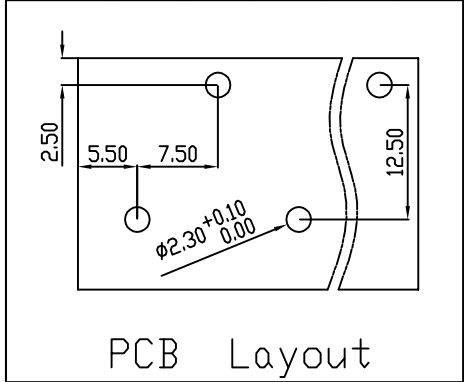



linear dimension(Tolerances Standard GB/T 14486-2008)										
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

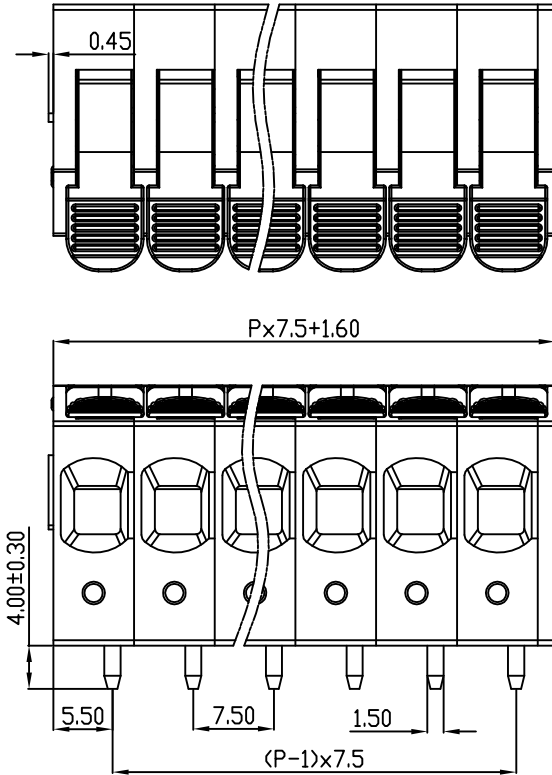

PCB Layout

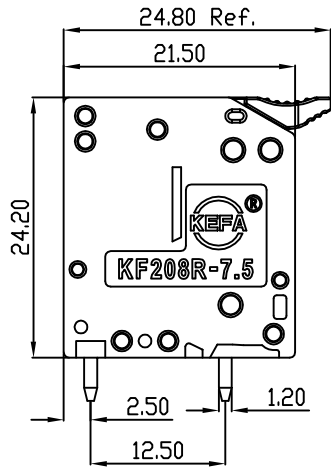

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		LZM	23.11.15

UL/CUL 技术 参数					
UL/CUL Technical Data					
等 级	Use Group	B	C	D	
额定电压	Rated Voltage	[V]	600	-	600
额定电流	Rated Current	[A]	41	-	5
接线范围	Wire Range	20-8			
单/多芯线	Solid/Stranded				[AWG]
耐电压	Withstanding Voltage	AC2200V/1Min			
IEC 技术参数					
IEC Technical Data					
过电压类别	Overvoltage Category	III	III	II	
污染等级	Contamination Class	3	2	2	
额定电压	Rated Voltage	[V]	800	1000	1000
额定电流	Rated Current	[A]	41	41	41
额定冲击电压	Impulse withstand voltagea	[KV]	8	8	8
导线截面积	Conductor cross section	硬线 0.75-10			
硬质/柔性导线	Solid/ flexible	[mm²]	软线 0.75-6		
材 料		Material			
绝缘材料	Insulation Material	热塑性材料 Thermoplastic			
阻燃等级	Inflammability	UL94V-0			
导体材料	Contact Material	铜合金 Copper alloy			
导体表面镀层	Contactive Coating	镀锡 Tin Plated			
一般参数 Other Data					
间距	Pitch	[mm]	7.5		
极数	Poles	[P]	01~XX		
剥线长度	Stripping Length	[mm]	12		
螺丝	Screw/扭矩	Torque(Max)	-		
工作温度	Operating temperatur	[°C]	-40~+105		
引针尺寸	Pin Dimensions	[mm]	4.0		
PCB板孔径	PCB Hole Diameter	[mm]	2.3		
安装类型	Mounting type	波峰焊 Wave soldering			

DES.	SJD	DATE	23.11.15	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角/THIRD ANGLE PROJECTION		版本 /	A
CHK.	BY	DATE	23.11.15	KEFA® 慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD							名称 /	REV	
APP.	LZM	DATE	23.11.15								TITLE	KF208RB-7.5	