

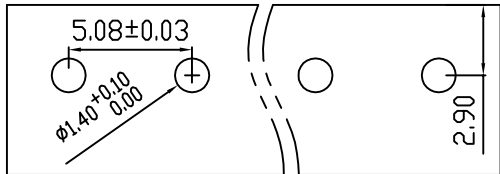
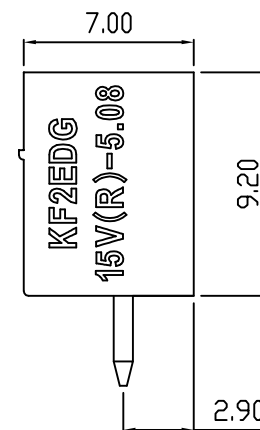
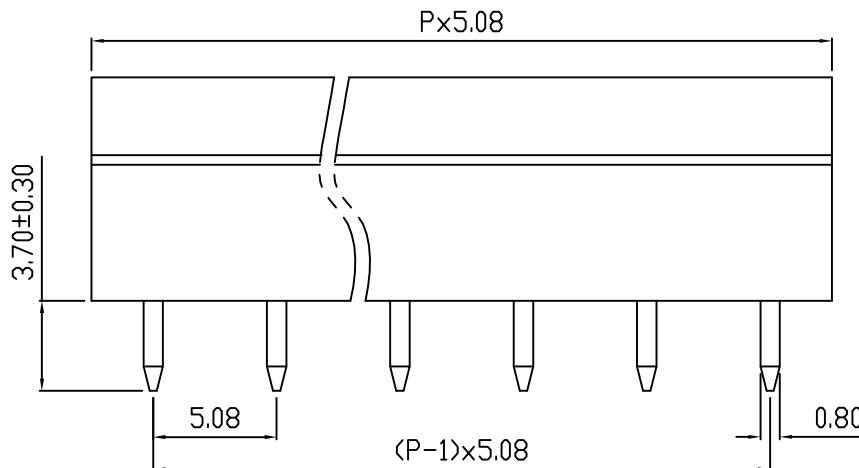


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



PCB LAYOUT

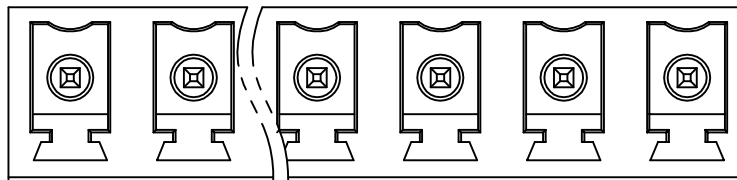

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

UL/CUL 技术参数		UL/CUL Technical Data				
等级	Use Group	B	C	D		
额定电压	Rated Voltage [V]	300	-	300		
额定电流	Rated Current [A]	8	-	10		
接线范围	Wire Range	-				
单/多芯线	Solid/Stranded [AWG]					
耐电压	Withstanding Voltage	AC1600V/1Min				
IEC 技术参数						
IEC Technical Data						
过电压类别	Overvoltage Category	III	III	II		
污染等级	Contamination Class	-	2	2		
额定电压	Rated Voltage [V]	-	320	630		
额定电流	Rated Current [A]	-	7	7		
额定冲击电压	Impulse withstand voltagea [KV]	-	4.0	4.0		
导线截面积	Conductor cross section	-				
硬质/柔性导线	Solid/ flexible [mm²]					
材 料 Material						
绝缘材料	Insulation Material	PA66				
阻燃等级	Imflammability					
导体材料	Contact Material	铜合金 Copper alloy				
导体表面镀层	Contactive Coating	镀锡 Tin Plated				
一般参数 Other Data						
间距 Pitch	[mm]	5.08				
极数 Poles	[P]	2-24				
剥线长度 Stripping Length	[mm]	-				
螺丝 Screw/扭矩 Torque(Max)	[N.m]	-				
工作温度 Operating temperatur	[°C]	-40~105				
引针尺寸 Pin Dimensions	[mm]	3.7				
PCB板孔径 PCB Hole Diameter	[mm]	1.4				

DES.		DATE		单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION		版本 /	A
CHK.		DATE				慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD				名称 /	KF2EDG15V-5.08		
APP.		DATE								TITLE			