


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

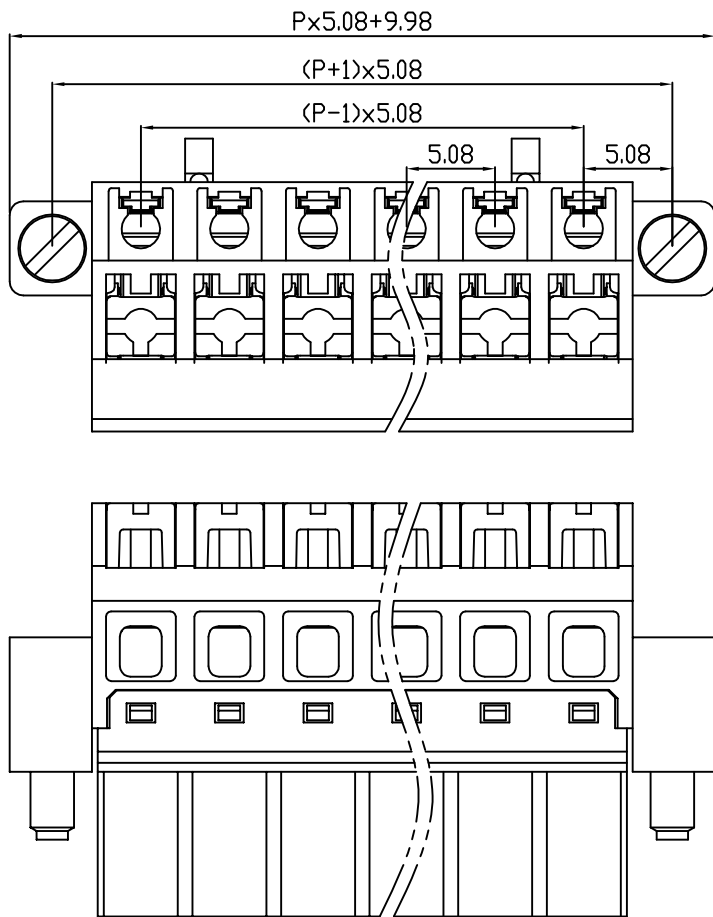

UL/CUL 技术参数 UL/CUL Technical Data						
等级 Use Group		B	C	D		
额定电压 Rated Voltage [V]		300	-	300		
额定电流 Rated Current [A]		12	-	10		
接线范围 Wire Range		24-12				
单/多芯线 Solid/Stranded [AWG]						
耐电压 Withstanding Voltage		1600V/1Min				
IEC 技术参数 IEC Technical Data						
过电压类别 Overvoltage Category		III	III	II		
污染等级 Contamination Class		3	2	2		
额定电压 Rated Voltage [V]		250	320	630		
额定电流 Rated Current [A]		12	12	12		
额定冲击电压 Impulse withstand voltage <sup>a</sup> [KV]		4	4	4		
导线截面积 Conductor cross section		2.5				
硬质/柔性导线 Solid/flexible [mm <sup>2</sup> ]						
材料 Material						
绝缘材料 Insulation Material		PA66				
阻燃等级 Imflammability		UL94V-0				
导体材料 Contactor Material		铜合金 Copper alloy				
导体表面镀层 Contactive Coating		镀镍 Ni Plated				
一般参数 Other Data						
间距 Pitch [mm]		5.08				
极数 Poles [P]		02~24				
剥线长度 Stripping Length [mm]		10~11				
螺丝 Screw/扭矩 Torque(Max) [N.m]		-				
工作温度 Operating temperatur [°C]		-40~+105				
引针尺寸 Pin Dimensions [mm]		-				
PCB板孔径 PCB Hole Diameter [mm]		-				

DES.	SJD	DATE	21.11.09
CHK.	BY	DATE	21.11.09
APP.	CLF	DATE	21.11.09

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD					

第三视角 / THIRD ANGLE PROJECTION		版本 / REV	A
		名称 / TITLE	KF2EDGKYBM-5.08