
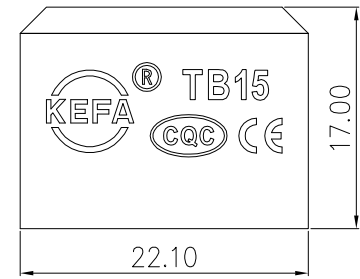


linear dimension(Tolerances Standard GB/T 14486-2008)								— ▯ ⊥		
variable range	to	over 6	over 10	over 30	over 60	over 100	over 160	to	over 10	over 100
	6	to 10	to 30	to 60	to 100	to 160	to 10	to 100	to	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.12.15

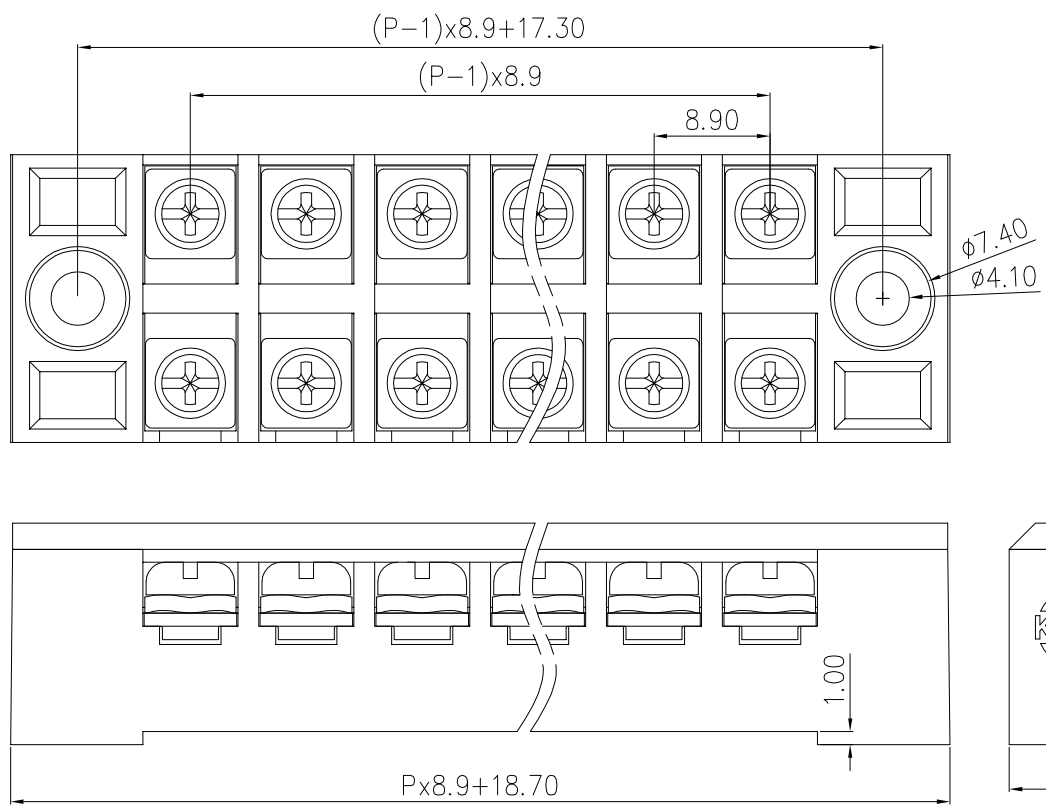

UL/CUL 技术参数 UL/CUL Technical Data					
等级	Use Group		B	C	D
额定电压	Rated Voltage [V]		600	-	-
额定电流	Rated Current [A]		15	-	-
接线范围	Wire Range		22-12		
单/多芯线	Solid/Stranded [AWG]				
IEC 技术参数 IEC Technical Data					
额定电压	Rated Voltage [V]		450		
额定电流	Rated Current [A]		32		
耐电压	Withstanding Voltage		2500V/1Min		
导线截面积	Conductor cross section		4.0		
硬质/柔性导线	Solid/flexible [mm ²]				
材料 Material					
绝缘材料	Insulation Material		PBT		
阻燃等级	Inflammability		UL94V-2		
导体材料	Contacting Material		铁合金 ferroalloy/铜合金 Copper alloy		
导体表面镀层	Contactive Coating		镀镍 Ni plating		
一般参数 Other Data					
间距	Pitch [mm]		8.9		
极数	Poles [P]		2-24		
剥线长度	Stripping Length [mm]		-		
螺丝/扭矩	Torque(Max) [N.m]		M3/0.8		
工作温度	Operating temperatur [°C]		-30~+120		
引针尺寸	Pin Dimensions [mm]		-		
PCB板孔径	PCB Hole Diameter [mm]		-		

DES.	LQQ	DATE	21.12.15	单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本/REV	A
CHK.	BY	DATE	21.12.15	慈溪市科发电子有限公司 CIXI KEFA ELECTRONICS CO., LTD	名称/TITLE		TB15-8.9					
APP.	CLF	DATE	21.12.15		名称/TITLE		TB15-8.9					